

2025 Catalog

Series 3

Compact Tractors

24 - 48.3 hp



For distribution and sales in North American territories

Series 3 Compact Tractors

The Series 3 tractors are equipped to take on bigger tasks in smaller spaces. These tractors deliver resilience and efficiency through streamlined design and high maneuverability.

Perfect for navigating low-ceiling areas with ease, the Series 3 tractors are primed to handle jobs of all sizes.



T3025C

Engine power 24 hp Lift capacity 1500 kg



T3025

Engine power 24 hp Lift capacity 1500 kg



2515

Engine power 24 hp Lift capacity 1500 kg



3015

Engine power 30 hp Lift capacity 1500 kg



3515C

Engine power 35 hp Lift capacity 1500 kg



3515

Engine power 35 hp Lift capacity 1500 kg



T394C

Engine power 37.4 hp Lift capacity 1197 kg



T394

Engine power 37.4 hp Lift capacity 1197 kg

Series 3

Compact Tractors



4215

Engine power Lift capacity
41 hp 1500 kg



4215C

Engine power Lift capacity
41 hp 1500 kg



4815

Engine power Lift capacity
48 hp 1500 kg



4815C

Engine power Lift capacity
48 hp 1500 kg



T474C

Engine power Lift capacity
48.3 hp 1220 kg



T474

Engine power Lift capacity
48.3 hp 1220 kg

Engineered for enhanced productivity and maneuverability

Engineered for productivity inside and out, the Series 3 tractors are ruggedly built and packed with features to minimize operator effort. These tractors come standard with sturdy cast iron linkages and easy to operate hydrostatic controls.

Good clearance from the ground and overhead makes it easier to work on uneven terrain or within structures. With high engine efficiency, impressive lift capabilities, and the option of a foldable ROPS or heated cabin, the Series 3 tractors are ideal for light-to-medium duty jobs, all year round.

Most popular applications



Arable Farming




Construction



Snow Clearing



Landscaping

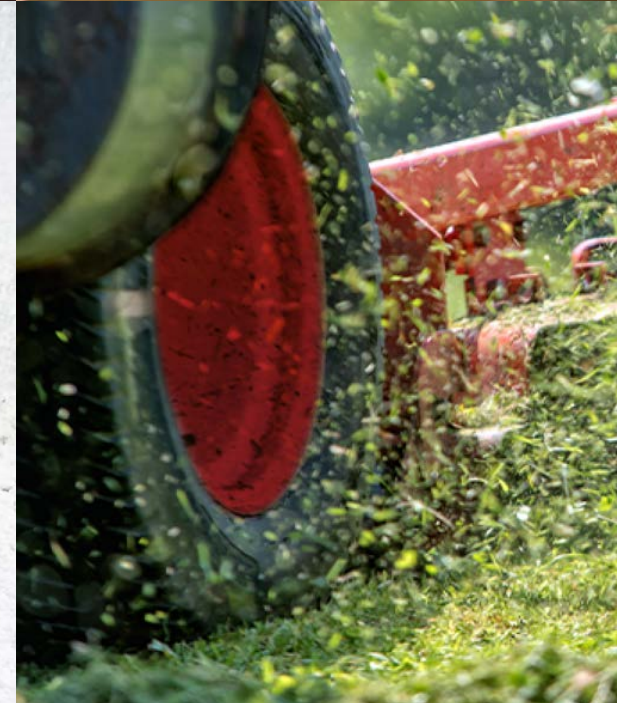

All the right features to get the job done



The highly economical TYM engine

The powerful 24-horsepower TYM engine eliminates the need for regeneration, reducing maintenance costs and making servicing easier and more convenient.

T3025C Lift Capacity vs Competitors		
TYM T3025C	Kioti CK2620	John Deere 3025E
3pt hitch lift capacity 2,425 lbs	1,631 lbs	1,356 lbs
Loader lift capacity 2,200 lbs	1,969 lbs	1,186 lbs

The most powerful 3-point hitch lift capacity

With the most powerful 3-point hitch lift capacity in its class, it can easily handle heavy implements and perform effortlessly in any work environment.



Cruise control

The cruise control feature allows you to set and maintain the engine RPM regardless of the tractor's load conditions.



Factory-installed joystick

The standard loader joystick helps perform various tasks. By installing a 3rd function kit as needed, it enables even more diverse operations, such as grapple work.



A cabin designed for a comfortable working environment in any condition

With the widest and most comfortable space in its class, this tractor maximizes operator comfort. It also offers enhanced visibility with standard heating and air conditioning.



External lever to adjust rear attachments

Along with in-cabin controls, this tractor has an external position lever near the 3-point hitch. Operators can adjust attachment positions immediately after connection without returning to the cabin, enabling quick and convenient attachment switching, which enhances tractor versatility.

T3025C


A compact tractor robust enough to take on challenges of all sizes



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. LED light (Standard)

Key specifications:

Engine power
24 hp | 18 kW

Engine manufacturer
TYM T1700N6

Lift capacity
3306 lb | 1500 kg

PTO power
21 hp | 15.7 kW



T3025

A robust compact tractor fit for challenges of all sizes




1. New iconic hood



2. Comfortable suspension seat



3. Toolbox



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
24 hp | 18 kW

Engine manufacturer
TYM T1700N6

Lift capacity
3307 lb | 1500 kg

PTO power
21 hp | 15.7 kW




2515

A compact tractor robust enough to take on challenges of all sizes



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST (2515H)



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:


Engine power	Engine manufacturer	Lift capacity	PTO power
24 hp 18 kW	TYM T1700N6	3306 lb 1500 kg	21 hp 15.7 kW

3015


A compact tractor robust enough to take on challenges of all sizes




1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST (3015H)



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
30 hp | 22.5 kW

Engine manufacturer
TYM T1700N3

Lift capacity
3306 lb | 1500 kg

PTO power
25 hp | 18.7 kW



3515C


A compact tractor that excels in performance and delivers results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
35 hp | 26.2 kW

Engine manufacturer
TYM T1700N2

Lift capacity
3306 lb | 1500 kg

PTO power
30 hp | 22.5 kW



4. Responsive forward/reverse HST



5. High-capacity fuel tank




6. Front-end loader joystick lever

3515


A compact tractor that excels in performance and delivers results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
35 hp | 26.2 kW

Engine manufacturer
TYM T1700N2

Lift capacity
3306 lb | 1500 kg

PTO power
30 hp | 22.4 kW



4. Responsive forward/reverse HST (3515H)



5. High-capacity fuel tank




6. High visibility instrumental panel

T394C

A compact tractor that outperforms its size and outsmarts limitations



1. Optional loader with high lift capacity



2. PTO on/off switch



3. Dual filter air cleaner



4. Cruise control



5. Cabin with heating and AC



6. Joystick control for front-end loader

Key specifications:

Engine power
37.4 hp | 27.5 kW

Engine manufacturer
Yanmar 3TNV88-CR

Lift capacity
2639 lb | 1197 kg

PTO power
30 hp | 22.5 kW




T394

A compact tractor that outperforms its size and outsmarts limitations



1. Optional loader with high lift capacity



2. PTO on/off switch



3. Dual filter air cleaner



4. Optional cruise control with kit



5. Foldable ROPS



6. Joystick control for front loader

Key specifications:

Engine power
37.4 hp | 27.5 kW

Engine manufacturer
Yanmar 3TNV88-CR

Lift capacity
2639 lb | 1197 kg

PTO power
30.2 hp | 22.5 kW




4215


Compact tractor blending versatility and power for unmatched results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
41 hp | 30.6 kW

Engine manufacturer
TYM T2000N2

Lift capacity
3306 lb | 1500 kg

PTO power
36 hp | 26.9 kW



4. Responsive forward/reverse HST (4215H)



5. High-capacity fuel tank



6. High visibility instrumental panel

4215C


A compact tractor that blends versatility with power for unmatched results



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
41 hp | 30.6 kW

Engine manufacturer
TYM T2000N2

Lift capacity
3306 lb | 1500 kg

PTO power
36 hp | 26.9 kW



4. Responsive forward/reverse HST



5. High-capacity fuel tank




6. Front-end loader joystick lever

4815

A compact tractor that outperforms its size for every task




1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever



4. Responsive forward/reverse HST (4815H)



5. High-capacity fuel tank



6. High visibility instrumental panel

Key specifications:

Engine power
48 hp | 35.8 kW

Engine manufacturer
TYM T2300N2

Lift capacity
3306 lb | 1500 kg

PTO power
40 hp | 30.7 kW

4815C


A compact tractor that outperforms its size for every task



1. New iconic hood



2. Comfortable suspension seat



3. Ergonomic lever

Key specifications:

Engine power
48 hp | 35.8 kW

Engine manufacturer
TYM T2300N2

Lift capacity
3306 lb | 1500 kg

PTO power
40 hp | 30.7 kW



4. Responsive forward/reverse HST



5. High-capacity fuel tank



6. Front-end loader joystick lever

T474C


A powerful compact tractor that helps you push the limits



1. Auto throttle



2. Auto PTO lever



3. Cruise control

Key specifications:

Engine power
48.3 hp | 36 kW

Engine manufacturer
TYM T2300N2

Lift capacity
2689.6 lb | 1220 kg

PTO power
35.9 hp | 26.4 kW



4. Cabin with heating and AC



5. Single rear attachment control



6. Shuttle transmission

T474


A powerful compact tractor that helps you push the limits



1. Auto throttle



2. Auto PTO lever



3. Cruise control

Key specifications:

Engine power
48.3 hp | 36 kW

Engine manufacturer
TYM T2300N2

Lift capacity
2689.6 lb | 1220 kg

PTO power
35.9 hp | 26.4 kW



4. Foldable ROPS



5. Single rear
attachment control



6. Shuttle
transmission

Specification Guide

MODEL	T3025C	T3025	2515	3015
ENGINE				
Engine manufacturer	TYM T1700N6	TYM T1700N6	TYM T1700N6	TYM T1700N3
Type	Natural aspiration	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	24 hp 18 kW	24 hp 18 kW	24 hp 18 kW	30 hp 22.5 kW
PTO power	21 hp 15.7 kW	21 hp 15.7 kW	21 hp 15.7 kW	25 hp 18.7 kW
Rated engine speed	2100 rpm	2100 rpm	2100 rpm	2600 rpm
No. of cylinders	3	3	3	3
Displacement	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc
Air cleaner	Dry element	Dry element	Dry element	Dry element
Alternator	12V, 70A	12V, 50A	12V, 50A	12V, 50A
Fuel system	IDI	IDI	IDI	IDI
POWERTRAIN				
Transmission type	HST	2515R: Synchromesh 2515H: HST	2515R: Synchromesh 2515H: HST	3015R: Synchromesh 3015H: HST
No. of speeds	3-Range	2515R: F12 x F12 2515H: 3-Range	2515R: F12 x R12 2515H: 3-Range	3015R: F12 x R12 3015H: 3-Range
Max. traveling speed	14.6 mph 23.6 km/h	2515R: 11.7 mph 18.8 km/h 2515H: 16.7 mph 26.8 km/h	2515R: 11.7 mph 18.8 km/h 2515H: 15.2 mph 24.4 km/h	3015R: 14.4 mph 23.2 km/h 3015H: 18.8 mph 30.2 km/h
Brakes	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	N/A	Dry single plate / N/A	Dry single plate / N/A	Dry single plate / N/A
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Dual gear pump	Dual gear pump
Implement flow	7.7 gpm 29.3 L/min	7.5 gpm 28.4 L/min	7.7 gpm 29.3 L/min	7.7 gpm 29.3 L/min
Steering flow	4.2 gpm 15.8 L/min	4.0 gpm 15.1 L/min	4.2 gpm 15.8 L/min	4.2 gpm 15.8 L/min
Total flow	11.9 gpm 45.1 L/min	11.5 gpm 43.5 L/min	11.9 gpm 45.1 L/min	11.9 gpm 45.1 L/min
Category, 3-point hitch	I	I	I	I
Hitch lift capacity	3306 lb 1500 kg	3307 lb 1500 kg	3306 lb 1500 kg	3306 lb 1500 kg
Hitch lift capacity at 24 inches behind link ends	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg
Lift control type	Position	Position	Position	Position
No. of standard remote valves	Loader: 4 / Rear: 0	Loader: 4 / Rear: 0 (Optional, up to 4)	Loader: 2 / Rear: 0	Loader: 2 / Rear: 0
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Wet/Multi disc	Electric/Hydro	Wet/Multi disc	Wet/Multi disc
PTO rear	540 rpm	540 rpm	540 rpm	540 rpm
CAPACITIES				
Fuel tank	7.1 gal 27 L	8.7 gal 33 L	7.1 gal 27 L	7.1 gal 27 L
Coolant	5.3 qt 5 L	5.3 qt 5 L	5.3 qt 5 L	5.3 qt 5 L
Crankcase	4.5 qt 4.3 L	4.5 qt 4.3 L	4.5 qt 4.3 L	4.5 qt 4.3 L
Transmission/Hydraulics system	9.8 gal 37 L	8.9 gal 34 L (Synchro) 9.8 gal 37 L (HST)	2515R: 9 gal 34 L 2515H: 9.8 gal 37 L	3015R: 9 gal 34 L 3015H: 9.8 gal 37 L
Front axle	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	120.9 in. 3071 mm	121 in. 3071 mm	120.9 in. 3071 mm	120.9 in. 3071 mm
Overall width	56.6 in. 1413 mm	56.3 in. 1430 mm	56.3 in. 1430 mm	56.3 in. 1430 mm
Wheelbase	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm
Height to top of ROPS	-	97.2 in. 2471 mm	97.3 in. 2471 mm	97.3 in. 2471 mm
Height to top of cabin	89.3 in. 2267 mm	-	-	-
Min. ground clearance	13.1 in. 334 mm	14.4 in. 366 mm	14.4 in. 366 mm	14.4 in. 366 mm
Min. turn radius with brakes	(L) 105.51 in. 2680 mm / (R) 104.72 in. 2660 mm	-	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm
Min. turn radius without brakes	(L) 105.51 in. 2680 mm / (R) 104.72 in. 2660 mm	105.5 in. / 2680 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm
Weight with ROPS	-	1347 kg 2969.6 lb	2515R: 1356 kg 2989 lb 2515H: 1347 kg 2969 lb	3015R: 3183 lb 1444 kg 3015H: 3163 lb 1435 kg
Weight with cab	3313 lb 1503 kg	-	-	-

MODEL	T3025C	T3025	2515	3015
STANDARD TIRES				
R1 Agricultural - Front	7-16, 6PR	8-16	8-16	8-16
R1 Agricultural - Rear	11.2-24, 8PR	12.4-24	12.4-24	12.4-24
R3 Turf - Front	-	27x8.5-15	27x8.5-15, 6PR	27x8.5-15, 6PR
R3 Turf - Rear	-	41x14.00	41x14.00, 4PR	41x14.00, 4PR
Golf Tires - Front	27x8.5-15, 6PR			
Golf Tires - Rear	41x14.00, 4PR			
R4 Industrial - Front	25x8.5-14, 6PR	10-16.5	10-16.5, 6PR	10-16.5, 6PR
R4 Industrial - Rear	380/70-19.5, 6PR	420/70-24	420/70-24, 6PR	420/70-24, 6PR

Specification Guide

MODEL	3515C	3515	T394C	T394
ENGINE				
Engine manufacturer	TYM T1700N2	TYM T1700N2	Yanmar 3TNV88-CR	Yanmar 3TNV88-CR
Type	Natural aspiration	3515R: Synchromesh 3515H: HST	Natural aspiration	Natural aspiration
Engine power	35 hp 26.2 kW	35 hp 26.2 kW	37.4 hp 27.5 kW	37.4 hp 27.5 kW
PTO power	30 hp 22.5 kW	30 hp 22.4 kW	30 hp 22.5 kW	30.2 hp 22.5 kW
Rated engine speed	2600 rpm	2600 rpm	3000 rpm	3000 rpm
No. of cylinders	3	3	3	3
Displacement	104.5 cu. in. 1714 cc	104.5 cu. in. 1714 cc	100.2 cu. in. 1642 cc	100.2 cu. in. 1642 cc
Air cleaner	Dry element	Dry element	Dual dry	Dual dry
Alternator	12V, 70A	12V, 50A	12V, 70A	12V, 50A
Fuel system	IDI	IDI	CRDI	CRDI
POWERTRAIN				
Transmission type	HST	3515R: Synchromesh 3515H: HST	Mechanical	Mechanical
No. of speeds	3-Range	3515R: F12 x R12 3515H: 3-Range	F12xR12	F12xR12
Max. traveling speed	18 mph 28.9 km/h	3515R: 14.4 mph 23.2 km/h 3515H: 18.8 mph 30.2 km/h	15.0 mph 24.2 km/h	15.0 mph 24.2 km/h
Brakes	Wet, Multi disc	Wet, Multi disc	Wet disc	Wet disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	N/A	Dry single plate / N/A	Dry single plate	Dry single plate
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Dual gear pump	Dual gear pump
Implement flow	7.7 gpm 29.3 L/min	7.7 gpm 29.3 L/min	6.1 gpm 23.2 L/min	6.1 gpm 23.2 L/min
Steering flow	4.2 gpm 15.8 L/min	4.2 gpm 15.8 L/min	4.4 gpm 16.7 L/min	4.4 gpm 16.7 L/min
Total flow	11.9 gpm 45.1 L/min	11.9 gpm 45.1 L/min	10.5 gpm 39.9 L/min	10.5 gpm 39.9 L/min
Category, 3-point hitch	I	I	I	I
Hitch lift capacity	3306 lb 1500 kg	3306 lb 1500 kg	2639 lb 1197 kg	2639 lb 1197 kg
Hitch lift capacity at 24 inches behind link ends	2425 lb 1100 kg	2425 lb 1100 kg	1558 lb 707 kg	1558 lb 707 kg
Lift control type	Position	Position	Position	Position
No. of standard remote valves	Loader: 4 / Rear: 0	Loader: 2 / Rear: 0	Optional (1 or 2)	Optional (1 or 2)
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Wet/Multi disc	Wet/Multi disc	Electric/Hydro	Electric/Hydro
PTO rear	540 rpm	540 rpm	540 rpm	540 rpm
CAPACITIES				
Fuel tank	7.1 gal 27 L	7.1 gal 27 L	9.0 gal 34 L	9.0 gal 34 L
Coolant	5.3 qt 5 L	5.3 qt 5 L	7.4 qt 7 L	7.4 qt 7 L
Crankcase	4.5 qt 4.2 L	4.5 qt 4.2 L	6 qt 5.7 L	6 qt 5.7 L
Transmission/Hydraulics system	9.8 gal 37 L	3515R: 9 gal 34 L 3515H: 9.8 gal 37 L	8.5 gal 32.2 L	8.5 gal 32.2 L
Front axle	6.8 qt 6.4 L	6.8 qt 6.4 L	8.7 qt 8.2 L	8.7 qt 8.2 L
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	120.9 in. 3071 mm	120.9 in. 3071 mm	126 in. 3200 mm	126 in. 3200 mm
Overall width	55.6 in. 1430 mm	56.3 in. 1430 mm	53.5 in. 1360 mm	53.5 in. 1360 mm
Wheelbase	65.7 in. 1670 mm	65.7 in. 1670 mm	66.9 in. 1700 mm	64.5 in. 1640 mm
Height to top of ROPS	-	97.3 in. 2471 mm	-	94.5 in. 2400 mm
Height to top of cabin	97.3 in. 2471 mm	-	92.5 in. 2350 mm	-
Min. ground clearance	14.4 in. 366 mm	14.4 in. 366 mm	12.8 in. 325 mm	12.8 in. 325 mm
Min. turn radius with brakes	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	2400 in. 2400 mm	94.4 in. 2400 mm
Min. turn radius without brakes	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	116 in. 2950 mm	116 in. 2950 mm
Weight with ROPS	-	3515R: 3183 lb 1444 kg 3515H: 3163 lb 1435 kg	-	3020 lb 1370 kg
Weight with cab	3552 lb 1611 kg	-	3417 lb 1550 kg	-

MODEL	3515C	3515	T394C	T394
STANDARD TIRES				
R1 Agricultural - Front	7-16	8-16	Farm Specialist 8.0-16 NHS TL 6PR	Farm Specialist 8.0-16 NHS TL 6PR
R1 Agricultural - Rear	11.2-24	12.4-24	Farm Specialist 12.4-24 NHS TL 6PR	Farm Specialist 12.4-24 NHS TL 6PR
R3 Turf - Front	27x8.5-15, 6PR	27x8.5-15, 6PR	27x10.5-15	27x10.5-15
R3 Turf - Rear	41x14.00, 4PR	41x14.00, 4PR	12.5-20	12.5-20
Golf Tires - Front				
Golf Tires - Rear				
R4 Industrial - Front	25x8.5-14, 6PR	10-16.5, 6PR	27x10.5-15	27x10.5-15
R4 Industrial - Rear	380/70-19.5, 6PR	420/70-24. 6PR	12.5x20	12.5x20

Specification Guide

MODEL	4215	4215C	4815	4815C
ENGINE				
Engine manufacturer	TYM T2000N2	TYM T2000N2	TYM T2300N2	TYM T2300N2
Type	Natural aspiration	Natural aspiration	Natural aspiration	Natural aspiration
Engine power	41 hp 30.6 kW	41 hp 30.6 kW	48 hp 35.8 kW	48 hp 35.8 kW
PTO power	36 hp 26.9 kW	36 hp 26.9 kW	40 hp 30.7 kW	40 hp 30.7 kW
Rated engine speed	2600 rpm	2600 rpm	2600 rpm	2600 rpm
No. of cylinders	4	4	4	4
Displacement	139.5 cu. in. 2287 cc	139.5 cu. in. 2287 cc	139.5 cu. in. 2287 cc	139.5 cu. in. 2287 cc
Air cleaner	Dry element	Dry element	Dry element	Dry element
Alternator	12V, 50A	12V, 70A	12V, 50A	12V, 70A
Fuel system	IDI	IDI	IDI	IDI
POWERTRAIN				
Transmission type	4215R: Synchromesh 4215H: HST	HST	4815R: Synchromesh 4815H: HST	HST
No. of speeds	4215R: F12 x R12 4215H: 3-Range	3-Range	4815R: 12F / 12R 4815H: 3-Range	3-Range
Max. traveling speed	4215R: 14.4 mph 23.1 km/h 4215H: 18.8 mph 30.2 km/h	18 mph 28.9 km/h	4815R: 14.9 mph 24 km/h 4815H: 18.8 mph 30.2 km/h	18 mph 28.9 km/h
Brakes	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc	Wet, Multi disc
Steering	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Clutch	Dry single plate NA	N/A	Dry single plate	N/A
HYDRAULIC SYSTEM				
Pump type	Dual gear pump	Dual gear pump	Dual gear pump	Dual gear pump
Implement flow	11.4 gpm 43.2 L/min	11.4 gpm 43.2 L/min	11.4 gpm 43.2 L/min	11.4 gpm 43.2 L/min
Steering flow	5.2 gpm 19.4 L/min	5.2 gpm 19.4 L/min	5.2 gpm 19.4 L/min	5.2 gpm 19.4 L/min
Total flow	16.5 gpm 62.6 L/min	16.5 gpm 62.6 L/min	16.5 gpm 62.6 L/min	16.5 gpm 62.6 L/min
Category, 3-point hitch	I	I	CAT I	I
Hitch lift capacity	3306 lb 1500 kg	3306 lb 1500 kg	3306 lb 1500 kg	3306 lb 1500 kg
Hitch lift capacity at 24 inches behind link ends	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg	2425 lb 1100 kg
Lift control type	Position	Position	Position	Position
No. of standard remote valves	Loader: 2 / Rear: 0	Loader: 2 / Rear: 0	Loader: 2 / Rear: 0	Loader: 4 / Rear: 0
PTO				
PTO type	Independent	Independent	Independent	Independent
PTO control	Wet/Multi disc	Wet/Multi disc	Wet/Multi disc	Wet/Multi disc
PTO rear	540 rpm	540 rpm	540 rpm	540 rpm
CAPACITIES				
Fuel tank	7.1 gal 27 L	7.1 gal 27 L	7.1 gal 27 L	7.1 gal 27 L
Coolant	5.8 qt 5.5 L	5.8 qt 5.5 L	5.8 qt 5.5 L	6.2 qt 5.9 L
Crankcase	4.8 qt 4.5 L	4.8 qt 4.5 L	4.8 qt 4.5 L	4.8 qt 4.5 L
Transmission/Hydraulics system	4215R: 9 gal 34 L 4215H: 9.8 gal 37 L	9.8 gal 37 L	4815R: 9 gal 34 L 4815H: 9.8 gal 37 L	9.8 gal 37 L
Front axle	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L	6.8 qt 6.4 L
DIMENSIONS & WEIGHTS				
Overall length with 3-point hitch	120.9 in. 3071 mm	120.9 in. 3071 mm	120.9 in. 3071 mm	120.9 in. 3071 mm
Overall width	56.3 in. 1430 mm	55.6 in. 1413 mm	56.3 in. 1430 mm	55.6 in. 1413 mm
Wheelbase	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm	65.7 in. 1670 mm
Height to top of ROPS	97.3 in. 2471 mm	-	97.3 in. 2471 mm	-
Height to top of cabin	-	mm in. 2267 89.3	-	mm in. 2267 89.3
Min. ground clearance	14.4 in. 366 mm	13.1 in. 334 mm	14.4 in. 366 mm	13.1 in. 334 mm
Min. turn radius with brakes	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm	(L) 98.0 in. 2490 mm / (R) 94.1 in. 2390 mm
Min. turn radius without brakes	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm	(L) 124.8 in. 3170 mm / (R) 121.3 in. 3080 mm
Weight with ROPS	4215R: 3278 lb 1487 kg 4215H: 3258 lb 1478 kg	-	3278 lb 1487 kg	-
Weight with cab	-	3644 lb 1653 kg	-	3587 lb 1636 kg
STANDARD TIRES				

MODEL	4215	4215C	4815	4815C
R1 Agricultural - Front	8-16	7-16	8-16	7-16
R1 Agricultural - Rear	12.4-24	11.2-24	12.4-24	11.2-24
R3 Turf - Front	27x8.5-15, 6PR	27x8.5-15, 6PR		
R3 Turf - Rear	41x14.00, 4PR	41x14.00, 4PR		
Golf Tires - Front				
Golf Tires - Rear				
R4 Industrial - Front	10-16.5, 6PR	25x8.5-14, 6PR	10-16.5	28x8.5-14
R4 Industrial - Rear	420/70-24. 6PR	380/70-19.5, 6PR	420/70×24	15-19.5

Specification Guide

MODEL	T474C	T474
ENGINE		
Engine manufacturer	TYM T2300N2	TYM T2300N2
Type	Natural aspiration	Natural aspiration
Engine power	48.3 hp 36 kW	48.3 hp 36 kW
PTO power	35.9 hp 26.4 kW	35.9 hp 26.4 kW
Rated engine speed	2600 rpm	2600 rpm
No. of cylinders	4	4
Displacement	139.5 cu. in. 2286 cc	139.5 cu. in. 2286 cc
Air cleaner	Single dry	Single dry
Alternator	12V, 70A	12V, 70A
Fuel system	IDI	IDI
POWERTRAIN		
Transmission type	Mechanical	Mechanical
No. of speeds	F12xR12	F12xR12
Max. traveling speed	14.9 mph 24 km/h	14.9 mph 24 km/h
Brakes	Wet disc	Wet disc
Steering	Hydrostatic	Hydrostatic
Clutch	Dry single plate	Dry single plate
HYDRAULIC SYSTEM		
Pump type	Dual gear pump	Dual gear pump
Implement flow	7.7 gpm 29 L/min	7.7 gpm 29 L/min
Steering flow	4.2 gpm 16.1 L/min	4.2 gpm 16.1 L/min
Total flow	11.9 gpm 45.1 L/min	11.9 gpm 45.1 L/min
Category, 3-point hitch	I	I
Hitch lift capacity	2689.6 lb 1220 kg	2689.6 lb 1220 kg
Hitch lift capacity at 24 inches behind link ends	1764 lb 673 kg	1764 lb 673 kg
Lift control type	Position	Position
No. of standard remote valves	1	1
PTO		
PTO type	Independent	Independent
PTO control	Electric/Hydro	Electric/Hydro
PTO rear	540 rpm	540 rpm
CAPACITIES		
Fuel tank	9.0 gal 34 L	9.0 gal 34 L
Coolant	6.9 qt 6.5 L	6.9 qt 6.5 L
Crankcase	6.8 qt 6.4 L	6.8 qt 6.4 L
Transmission/Hydraulics system	8.5 gal 32.2 L	8.5 gal 32.2 L
Front axle	8.7 qt 2.1 L	8.7 qt 2.1 L
DIMENSIONS & WEIGHTS		
Overall length with 3-point hitch	131 in. 3320 mm	131 in. 3320 mm
Overall width	54.5 in. 1385 mm	54.5 in. 1385 mm
Wheelbase	69.7 in. 1770 mm	69.7 in. 1770 mm
Height to top of ROPS	-	94.5 in. 2400 mm
Height to top of cabin	92.5 in. 2350 mm	-
Min. ground clearance	12.8 in. 325 mm	12.8 in. 325 mm
Min. turn radius with brakes	106.7 in. 2710 mm	106.7 in. 2710 mm
Min. turn radius without brakes	117.5 in. 2985 mm	117.5 in. 2985 mm
Weight with ROPS	-	3289 lb 1492 kg
Weight with cab	3607 lb 1636 kg	-
STANDARD TIRES		
R1 Agricultural - Front	Farm Specialist 8.0-16 NHS TL 6PR	Farm Specialist 8.0-16 NHS TL 6PR
R1 Agricultural - Rear	Farm Specialist 12.4-24 NHS TL 6PR	Farm Specialist 12.4-24 NHS TL 6PR
R3 Turf - Front	Multi-Trac CS 27x10.5-15 NHS TL 4PR	Multi-Trac CS 27x10.5-15 NHS TL 4PR
R3 Turf - Rear	12.5x20	12.5x20
Golf Tires - Front		
Golf Tires - Rear		

MODEL	T474C	T474
R4 Industrial - Front	Trac Chief 10-16.50 NHS TL 6PR	Trac Chief 10-16.50 NHS TL 6PR
R4 Industrial - Rear	Xtra Grip 43x16.00-20 NHS TL 6PR	Xtra Grip 43x16.00-20 NHS TL 6PR



Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world