

T2025P

Sub-Compact, Series 2
24.7 hp




A sub-compact tractor engineered for productivity inside and out

The T2025P sub-compact tractor is your capable partner for turning outdoor plans into reality—whether you're maintaining a healthy lawn, cultivating a hobby farm, or creating a backyard retreat. Compact in size yet powerful in performance, this tractor delivers the muscle you need along with exceptional maneuverability and premium features you'll appreciate.




1. Mechanical suspension seat



3. Tool box




5. High visibility lever

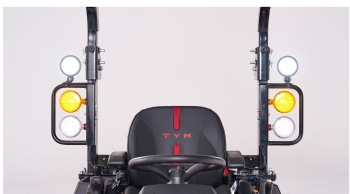

2. Integrated work signal lighting



4. Easy reach SCV lever




6. Easy oil access




3-Point Hitch With Powerful Lift Capacity

The 3-point linkage on the rear has an impressive lift capacity that reaches the end ball joint. The rear PTO control can be used to adjust rpm based on the task, increasing it for more intensive applications like slashing and digging.

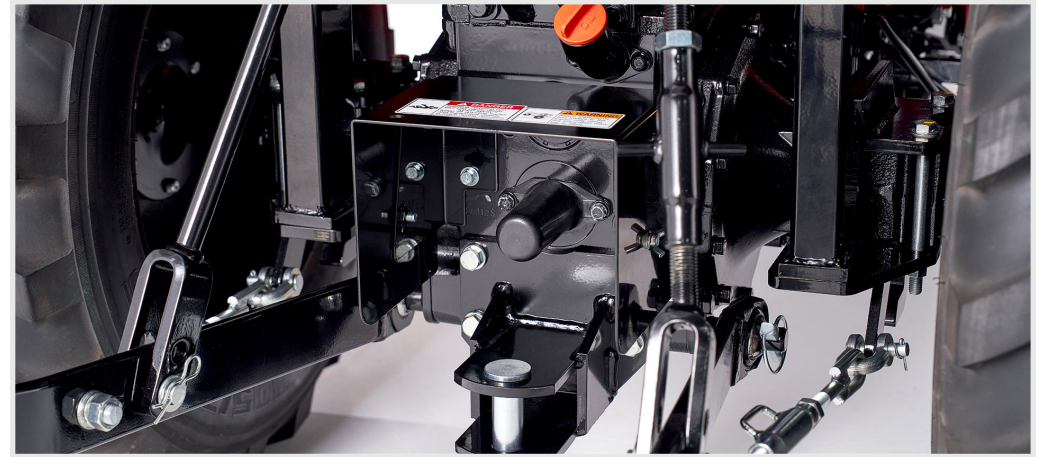

Flip PTO Cover

Enhanced safety and protection for your PTO shaft with the convenient Flip PTO Cover. When not in use, it shields the PTO from debris and obstructions, while the flip-up design allows quick, effortless access whenever you need it.

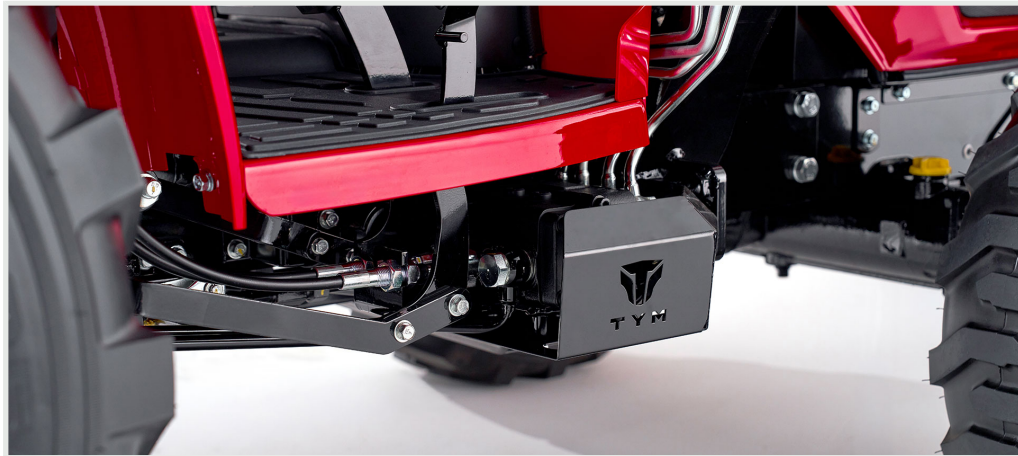

Loader Valve With Guard

Ready for work, this tractor features a 4-port floating/regen loader valve with an integrated guard that helps protect against damage from debris and obstacles encountered on the job.



Tilt steering wheel

The T2025P features a tilt steering wheel that allows quick, effortless adjustment to your preferred position via a convenient foot pedal for easy release and secure locking.



High-Capacity Fuel Tank for Extended Work

With an 8.5-gallon fuel tank—28% larger than its predecessor—this tractor keeps you working longer without frequent refueling. Combined with a fuel-efficient engine, it delivers uninterrupted performance, helping you tackle even the busiest seasons with maximum efficiency.



Steel Fender and Floor Panels

Built for strength and longevity, the T2025P features steel fenders and floor panels, delivering the durability needed to handle the toughest tasks with confidence.



Space-Saving Foldable ROPS

With a reduced height compared to its predecessor, the newly redesigned ROPS is easy to assemble and features a foldable design that allows further height reduction by folding to 90 or 180 degrees, providing added convenience for storage in low-clearance areas.



Optional 3rd Function Hydraulic Valve

The T2025P comes standard with a 2-button loader joystick, but for greater versatility, an optional True 3rd Function installation kit is available. This upgrade allows full use of a 4-in-1 bucket attachment, enabling lifting, tilting, dumping, and grappling for maximum productivity.

Technical specifications

ENGINE	
Engine Manufacturer	Yanmar 3TNV80F-NXDKTFX
Type	Natural aspiration
Gross engine power	24.7 hp 18.4 kW
PTO power	18.3 hp 13.6 kW
Rated engine speed	3000 rpm
No. of cylinders	3
Displacement	77.3 cu. in. 1267 cc
Air cleaner	Single dry
Alternator	12V, 40A
Fuel system	IDI
POWERTRAIN	
Transmission type	HST
No. of speeds	2
Max. traveling speed	13.57 mph 21.84 km/h
Brakes	Wet disc
Steering	Hydraulic
Clutch	N/A
CAPACITIES	
Fuel tank	8.4 gal 32 L
Coolant	3.6 gal 0.95 L
Transmission/Hydraulics system	4.49 gal 17 L
Front axle	4.5 L 1.18 gal

PTO	
PTO type	Independent
PTO control	Electric/Hydro
PTO rear	540 rpm
HYDRAULIC SYSTEM	
Pump type	Single gear pump
Implement flow	4.17 gpm 15.8 L/min
Steering flow	2.77 gpm 10.5 L/min
Total flow	6.94 gpm 26.3 L/min
Category, 3-point hitch	I
Hitch lift capacity	1550 lb 703 kg
Hitch lift capacity at 24 inches behind link ends	1235 lb 560 kg
Lift control type	Position
No. of standard remote valves	4/2 (1 set)
DIMENSIONS & WEIGHTS	
Overall length with 3-point hitch	105.11 in. 2670 mm
Overall width	56.29 in. 1430 mm
Wheelbase	61.02 in. 1550 mm
Height to top of ROPS	85.94 in. 2183 mm
Min. ground clearance	10.23 in. 260 mm
Min. turn radius with brakes	102.40 in. 2601 mm
Min. turn radius without brakes	110.23 in. 2800 mm
Weight with ROPS	2206.8 lb 1000 kg
STANDARD TIRES	
R3 Turf - Front	23x8.5-12
R3 Turf - Rear	33x12.5-16.5
R4 Industrial - Front	23x8.5-14
R4 Industrial - Rear	14-17.5
FRONT TIRES	
Hybrid - Front	25x8.5-14
Hybrid - Rear	14-17.5

L2025P Front-End Loader

Attachments

Enhance the functionality of your T2025P tractor with the L2025P. With its impressive lift capacity and height, the L2025P front-end loader can help you handle heavier loads of materials.

Lift height	87.7 in. 2228 mm
Lift capacity at pivot point (max. height)	1380 lb 626 kgf
Bucket capacity	5.7 cu. ft 0.16 cu. m

CAPACITIES & REACH	
Lift height	87.7 in. 2228 mm
Max. lift height under level bucket	82.3 in. 2090 mm
Clearance with bucket dumped	65.3 in. 1658 mm
Reach at maximum lift height	23.2 in. 590 mm
Max. dump angle	50°
Reach with bucket on ground	56.9 in. 1445 mm
Max. rollback angle	27°
Digging depth	3.9 in. 100 mm
Lift capacity at pivot point (max. height)	1380 lb 626 kgf
Breakout force at ground level, pivot pins	2059 lb 934 kgf
Bucket rollback force at ground line	1596 lb 724 kgf
Bucket capacity	5.7 cu. ft 0.16 cu. m
Self leveling	NA
Relief valve setting (loader control valve)	2276 psi 160 kg/sq. cm

CYCLE TIMES	
Boom raising time	4.4 sec
Boom lowering time	2.6 sec
Bucket rollback time	2.9 sec
Bucket dumping time	4.1 sec



DIMENSIONS & WEIGHTS	
Overall height in carry position	47.4 in. 1205 mm
Depth of Attachment (to the back of the inner shell)	18.5 in. 470 mm
Height of Attachment	19.5 in. 495 mm
Length of Attachment (to pivot pin)	25.6 in. 650 mm
Weight of boom & quick attach mechanism (1)	364 lb 165 kg
Weight of mounting frame (2)	139 lb 63 kg
Weight of bucket (3)	176 lb 80 kg
Loader total weight (1+2+3)	679 lb 308 kg
Lift cylinder	1.77 × 1.18 in. 45 × 30 mm
Bucket cylinder	1.97 × 1.18 in. 50 × 30 mm
Attachment used for specification	59 in. 1492 mm

COMPATIBLE BUCKET SIZES	
TYM's multi-purpose buckets are capable of bulldozing, scraping, loading, metering, moving, and clamping material.	
60" Front-End Loader bucket	

TM60 Mid-Mount Mower

Attachments

Built with 60-inch working width cutting deck and 5.12-inch transport height, the TYM TM60 mid-mount mower attachment is designed to optimize your cutting time and improve cut quality.

Blade Velocity	18362 fpm
Blade Length	20.8 in. 528.3 mm
Working width	60 in. 1524 mm

PERFORMANCE	
No. of blades	3 EA
Blade Velocity	18362 fpm
Blade Length	20.8 in. 528.3 mm
Power Rating	20-25 hp 14.9-18.6 kW

DIMENSIONS & WEIGHTS	
Working width	60 in. 1524 mm
Length	0.13 in. 3.3 mm
Width	2.92 in. 74.3 mm
Height	0.28 in. 7.2 mm
Weight	272 lb 123.4 kg
Cutting height	1 - 4 in. 25.4 - 101.6 mm
Transport height	5.12 in. 130 mm



GENERAL	
Type	Side discharge
Mounting method	Parallel linkage
Lift linkage type	Lower link lift
Adjustment of increment	Dial gauge
Dial gauge hole	7 EA
Dial gauge gab between hole	0.5 in. 12.7 mm
Dial gauge total gab	3 in. 76.2 mm
Universal joint	Ø21.6 × 525 L
Wheel	4 EA
Assistant wheel	1 EA
Belt	V-Belt
Color	Super RED
Deck thickness	0.13 in. 3.3 mm

TB65 Backhoe

Attachments

The TB65 is engineered to handle your scaled-up requirements. This TYM backhoe attachment offers enhanced functionality without compromising balance with an enhanced dig depth and wider swing angle.

Digging depth	80.4 in. 2042 mm
Loading height	63 in. 1602 mm
Backhoe reach	117.7 in. 2989 mm

PERFORMANCE	
Digging depth	80.4 in. 2042 mm
Loading height	63 in. 1602 mm
Max. leveling angle	10°
Angle of departure	15°

DIMENSIONS & WEIGHTS	
Transport overhang	45.7 in. 1162 mm
Transport height (max.)	81.1 in. 2060 mm
Compatible bucket sizes	9" backhoe bucket
Compatible bucket sizes	12" backhoe bucket
Compatible bucket sizes	16" backhoe bucket
Compatible bucket sizes	18" backhoe bucket



CAPACITIES & REACH	
Backhoe reach	117.7 in. 2989 mm
Swing angle	180°
Bucket rotation	180°
Stabilizer spread (lowered position)	70.5 in. 1792 mm
Stabilizer spread (raised position)	60 in. 1525 mm

COMPATIBLE BUCKET SIZES	
TYM's multi-purpose buckets are capable of bulldozing, scraping, loading, metering, moving, and clamping material.	
9" backhoe bucket	12" backhoe bucket
16" backhoe bucket	18" backhoe bucket

Upgrades for the Series 2 T2025P

Complement the capabilities of your TYM tractor with compatible accessories and options.

ACCESSORIES
Front counterweights
Mulching kits
ROPS-mounted bluetooth speaker
TB65A Mechanical Thumb
ROPS-mounted light kit
Mid-PTO kit
Block heater
BHPAD100 Street Pads
Auxiliary hydraulic kit
Rear wiper kit

OPTIONS			
Tire	R3 Turf Tires	F Turf Master 23x8.50 - 12 NHS TL 4PR	R Multi-Trac CS 33x12.50-16.5 NHS TL 4PR
Tire	R4 Industrial Tires	F Trac Chief 23x8.50 - 14 NHS TL 4PR	R Trac Chief 14-17.5 NHS TL 6PR





Designed for your world

TYM creates tractors that bring together alluring form, advanced function and accessible value. Through Korean expertise in design, engineering and manufacturing, the company helps owners overcome every obstacle as they shape the world around them.

Headquartered in Korea with distribution across North America, Europe, and Asia, and assembly operations in the USA, TYM has been empowering customers for over 70 years.

www.tym.world